

Strain-assisted optomechanical coupling of polariton condensate spin to a micromechanical resonator

O. Be'er,¹ H. Ohadi,^{1(a)} Y. del Valle-Inclan Redondo,¹ A. J. Ramsay,² S. I. Tsintzos,³ Z. Hatzopoulos,³ P. G. Savvidis,^{3,4,5} and J. J. Baumberg^{1(b)}

¹*Cavendish Laboratory, Department of Physics, NanoPhotonics Centre, University of Cambridge, Cambridge CB3 0HE, United Kingdom*

²*Hitachi Cambridge Laboratory, Hitachi Europe Ltd., Cambridge CB3 0HE, United Kingdom*

³*FORTH, Institute of Electronic Structure and Laser, 71110 Heraklion, Crete, Greece*

⁴*Department of Materials Science and Technology, University of Crete, 71003 Heraklion, Crete, Greece*

⁵*ITMO University, St. Petersburg 197101, Russia*

(Received 2 November 2017; accepted 9 December 2017; published online 27 December 2017)

We report spin and intensity coupling of an exciton-polariton condensate to the mechanical vibrations of a circular membrane microcavity. We optically drive the microcavity resonator at the lowest mechanical resonance frequency while creating an optically trapped spin-polarized polariton condensate in different locations on the microcavity and observe spin and intensity oscillations of the condensate at the vibration frequency of the resonator. Spin oscillations are induced by vibrational strain driving, whilst the modulation of the optical trap due to the displacement of the membrane causes intensity oscillations in the condensate emission. Our results demonstrate spin-phonon coupling in a macroscopically coherent condensate. *Published by AIP Publishing.*

<https://doi.org/10.1063/1.5011719>

There is growing interest in coupling vibrations to other degrees of freedom in order to probe, sense, and cool mechanical resonators. Examples include coupling of cavity phonons to cavity photons,¹ effects of vibration on photocurrent,² vibration-based logic gates,³ coupling of vibrations to the spin of single nitrogen-vacancy centers,⁴ magnetization reversal in molecular magnets,⁵ ferromagnetic resonance⁶ or spin transport⁷ by surface acoustic waves, and vibrational coupling of quantum dots to photonic crystal cavities.⁸ An emerging opportunity is to vibration-modulate polaritons—these are quasiparticles that result from the strong coupling of cavity photons to quantum-well (QW) excitons⁹ and can condense into macroscopic quantum states.^{10–12} Mechanical effects on microcavity exciton-polaritons have been demonstrated before, either by applying static pressure¹³ or by inducing acoustic waves over the microcavity surface.¹⁴ Recently, optomechanical feedback coupling through the nonlinearity of the polariton system has also been proposed.¹⁵ However, the coupling of the spin (or magnetic moment) of a condensate to vibrations has not yet been achieved.

Here, we demonstrate coupling of the occupation (intensity) and spin (polarization) of an optically trapped polariton condensate to the lowest vibrational mode of a circular membrane microcavity (forming an acoustic resonator) [Fig. 1(a)]. We find that polarization modulation is mediated by strain, whereas condensate intensity varies through the modulation of the optical trap due to displacement of the membrane. Our work is a demonstration of the coupling of spin to vibrations in a quantum many-body system and has potential applications in strain sensing^{8,16} and spin-chain interactions.¹⁷

We create a trapped polariton condensate by non-resonant optical pumping of a GaAs QW microcavity.^{18,19}

The polariton pump ($P_1 = 20$ mW and $\lambda_1 = 765$ nm) is patterned into a 4-spot trap using a spatial light modulator (SLM) [Fig. 1(b)]. This non-resonant polariton pump is blue detuned from the optical resonance of the microcavity creating a reservoir of hot excitons at each pump spot. The reservoir excitons spread out due to repulsive Coulomb interactions and rapidly lose energy until they form polaritons. The polariton pump provides both gain medium and trapping potential.^{20,21} Above a critical threshold, polaritons spontaneously condense into a macroscopically coherent state inside the trap due to stimulated scattering.²²

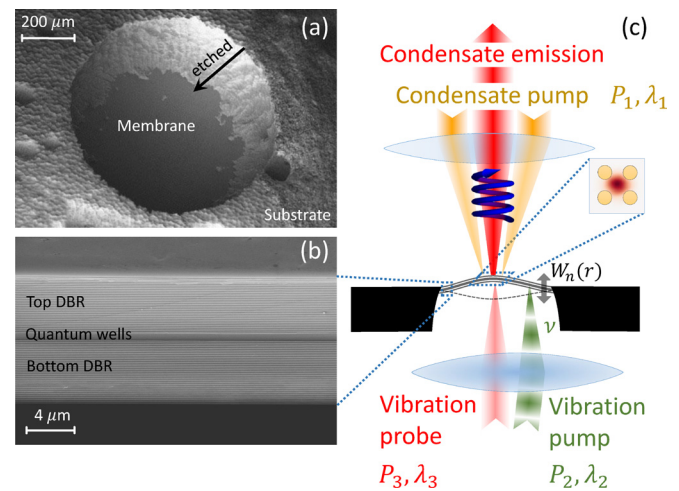


FIG. 1. (a) Electron microscopy image of the microcavity membrane, taken from the etched backside. (b) Cross section of the membrane. (c) Experimental setup. Above the membrane (front side), orange beams form the four-spot polariton trap giving circularly polarized polariton emission (red). Below the membrane (backside), the green beam is the amplitude modulated vibration-inducing pump, and the pink beam is the vibration probe.

^{a)}ho278@cam.ac.uk

^{b)}jjb12@cam.ac.uk

Polariton spin is quantized (± 1) along the growth axis of the microcavity, emitting photons with left- (σ^-) or right (σ^+) circular polarization when they decay. Above a spin-bifurcation power threshold (under appropriate conditions), condensed polaritons spontaneously magnetize into specific randomly selected spin states. The spin-bifurcation process is driven by the dissipation rate difference (γ) and energy splitting (ε) of the horizontally and vertically polarized polaritons due to birefringence.¹⁹ We operate above this threshold, where the degree of circular polarization (condensate spin) s_z exceeds 90% (Fig. 2). By slightly changing the polarization of the polariton pump laser to left- (or right-) circularly polarized ($<5\%$), we can deterministically form spin-down (or up) polariton condensates.

We measure the circular degree of polarization $s_z = (I_{\sigma^+} - I_{\sigma^-}) / (I_{\sigma^+} + I_{\sigma^-})$ and the total intensity $I = (I_{\sigma^+} + I_{\sigma^-})$ of the condensate in the membrane microcavity while optically exciting the fundamental vibrational mode of the resonator. The condensate spin, which is the z -component of the polarization vector, varies quadratically with the energy splitting, $s_z \propto \varepsilon^2$, which is now modulated by the periodically driven strain.^{13,19}

The microcavity is composed of two distributed Bragg reflector (DBR) mirrors (32 layers) which form a $5/2\lambda$ cavity sandwiching 10-nm GaAs QWs placed at the maxima of the cavity light field (see Ref. 18 for more details). To form a mechanical resonator, the 300 μm thick GaAs substrate of the microcavity is chemically etched to release $\sim 700 \mu\text{m}$ -diameter membranes of thickness $h = 8.7 \mu\text{m}$ [Figs. 1(a) and 1(b)].

Membrane microcavities are mounted inside a cryostat with optical access from both sides of the sample. To mechanically excite the resonator, the backside of the sample is periodically heated with an amplitude-modulated continuous wave (CW) Ti:Sapphire laser {"vibration-pump" $P_2 \simeq 4 \text{ mW}$ [Fig. 1(c)]}. To maximise absorption in the resonator, the vibration pump laser wavelength $\lambda_2 = 765\text{--}775 \text{ nm}$ is blue detuned from the microcavity stop-band.²³ The acousto-optic modulation frequency is then tuned through the vibration resonance.

For vibration detection, we use a diode laser ("vibration-probe" $P_3 \simeq 1 \text{ mW}$) from the back side. The vibration probe $\lambda_3 = 800 \text{ nm}$ is set to the microcavity stop-band reflection maximum. The reflected probe beam is interfered with a reference beam on the detection photodiode. By calibrating the maximum amplitude of interference signals, the membrane displacement can be accurately measured. The vibration

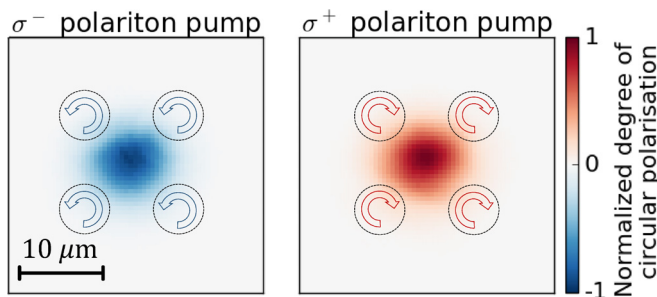


FIG. 2. Experimental emission from the two possible states of the trapped polariton condensate: spin-up (right-circularly polarized, red) or spin-down (left-circularly polarized, blue). Circles show slightly circularly polarized polariton pump spots.

pump is located more than 200 μm from the polariton condensate to avoid any additional polariton injection.

We first create condensates with fixed circular polarization (that persists while the pump is on) by tuning the circular polarization of the polariton pump (Fig. 2). The circular degree of condensate polarization is measured using a polarization beamsplitter and two photomultipliers. All three lasers (polariton pump, vibration-pump, and vibration-probe) are turned on for each 130 ms measurement. The total intensity (I) and the circular polarization (s_z) of the condensate emission are measured at different positions across the microcavity membrane as the frequency of the vibration pump is scanned.

To find the resonance frequencies of the membrane, we first perform a frequency scan at room temperature [Fig. 3(a)]. A resonance is observed by the vibration-probe whenever the modulation frequency of the vibration-pump laser coincides with a mechanical resonance of the membrane. Vibration is induced by the photothermal effect.²⁴ The highest vibration frequency that can be excited in the microcavity is $f_{max} = 1/\tau = 4\pi D/r^2 \simeq 1.5 \text{ GHz}$, where τ is the relaxation time, $D = 3.1 \times 10^{-3} \text{ m}^2/\text{s}$ is the thermal diffusivity of GaAs, and $r = 5 \times 10^{-6} \text{ m}$ is the radius of the vibration-pump spot. While the mechanical quality-factor of the resonator at room temperature is low (~ 300), at cryogenic temperatures ($T = 5 \text{ K}$), the quality factor of the fundamental mode at $f_0 = 104 \text{ kHz}$ rises to ~ 7300 [Figs. 3(b) and 3(c)]. At this resonance, a vibration amplitude of 3 nm is measured at the center of membrane using our calibrated interferometer [Fig. 4(b)].

The membrane displacement and strain are treated as those of a clamped plate. The n th mode spatial displacement at membrane position (r, θ) due to free vibration is then²⁵

$$W_n(r, \theta) = C_n \left[-\frac{I_n(k_n a)}{J_n(k_n a)} J_n(k_n r) + I_n(k_n r) \right] \cos(n\theta), \quad (1)$$

with k_n defined by

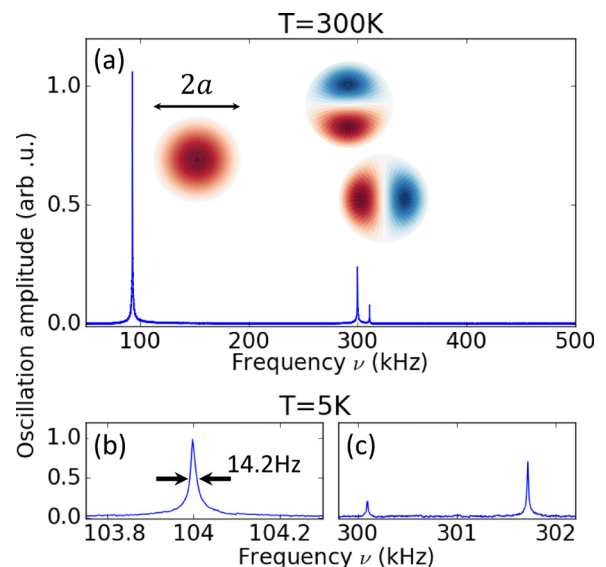


FIG. 3. Mechanical vibration spectrum of the microcavity membrane with the first three modes and their simulated displacements at (a) room temperature and (b) and (c) at cryogenic temperatures acquired using lock-in detection.

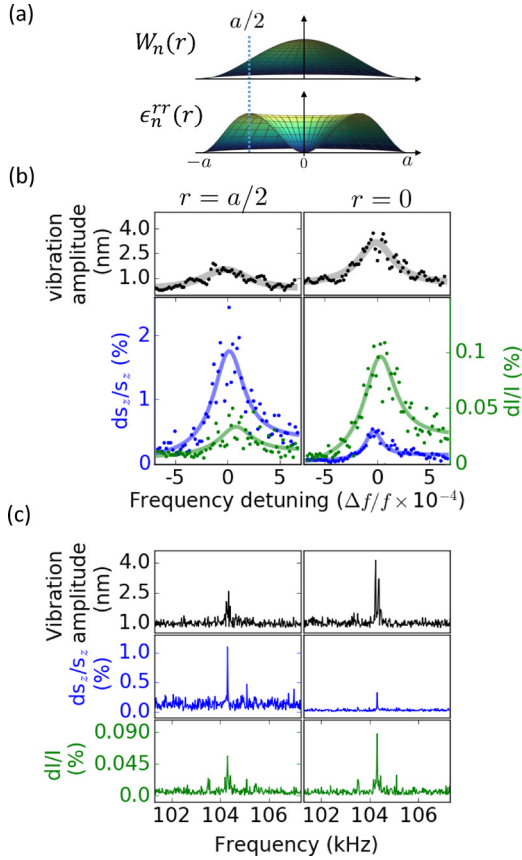


FIG. 4. (a) Displacement (W_n) and radial strain ϵ_n^{rr} of the fundamental vibration mode of the membrane. (b) Amplitude of the Fourier component at mechanical drive frequency measured at two positions $r = 0, a/2$. (Top) Membrane displacement, (bottom, blue) polarization of condensate, and (bottom, green) intensity of condensate. Gray lines are Lorentzian fits to the mechanical oscillation and blue and green lines are moving averages of polarization and intensity. Each dot is the maximum of the power spectrum at the vibration frequency. (c) Power spectrum of the membrane vibration and polariton polarization and intensity around the resonance of mechanical driving, extracted from the Fourier transform of the corresponding time traces.

$$k_n^2 = \omega_n \sqrt{\rho h / D}. \quad (2)$$

Here, C_n is proportional to the maximal mechanical oscillation amplitude, n is the mode number, J_n (I_n) is the (modified) Bessel function, $a = 350 \mu\text{m}$ is the plate radius, ρ is the mass density of the membrane (4450 kg/m^3), $D = Eh^3/[12(1-\nu^2)]$ is the flexural rigidity, with Young's modulus of the (100) plane along the [110] direction $E = 80 \text{ GPa}$,²⁶ and with Poisson ratio $\nu = 0.3$. Using these values gives $f_0 = \omega_0/2\pi = 136 \text{ kHz}$ (and $k_0a = 3.2$) which is larger than the measured 104 kHz. This discrepancy suggests that there is some radial tension in the membrane. The calculated displacement patterns of the first two modes ($W_{0,1}$) are plotted in Fig. 3(a). The radial strain for the fundamental mode [Fig. 4(a)] is

$$\epsilon_{rr} = \frac{1}{2} \left(\frac{\partial W_0}{\partial r} \right)^2. \quad (3)$$

As shown in Fig. 4(a), this strain is zero at the center of the membrane and maximized at $r = a/2$.

The mechanical resonance is observed in measurements of the condensate circular polarization and total intensity

[Fig. 4(b)]. This coupling of mechanical vibration to condensate polarization and intensity is position dependent and governed by strain and displacement. To extract their amplitudes, the Fourier transforms of I, s_z are taken as the driving frequency is scanned [Fig. 4(c)]. Sidebands in intensity are due to intensity modulations of the SLM ($\sim 1 \text{ kHz}$). When the polariton condensate is located $100 \mu\text{m}$ from the center of the membrane at $r \sim a/2$ [Fig. 4(a), left], the displacement modulation is small, whereas the strain modulation is maximal. For this reason, the polarization-modulation is the strongest while the intensity modulation is reduced. On the other hand, at the center of the membrane ($r = 0$) where the displacement is maximum and strain is minimum [Fig. 4(a), right], the polarization oscillation is also minimum and the intensity oscillation is maximum. In the optimal off-center position ($r \sim a/2$), a maximum polarization modulation of $\sim 1.2\%$ is observed where the radial strain amplitude is maximum [$\max(\epsilon_{rr}) = 4 \times 10^{-11}$]. We now explain how this can yield the modulation of the condensate embedded in the vibration multilayer.

The modulation of spin due to membrane displacement is described using a zero-dimensional (0D) model of polariton condensates which includes the spin bifurcation (see Ref. 19 for details). In this case, the birefringence is modulated by the mechanical vibration at a frequency f

$$\varepsilon = \varepsilon + \delta\varepsilon \cos(2\pi f_0 t), \quad (4)$$

where $\delta\varepsilon$ is the modulation depth. For small $\delta\varepsilon$, the spin modulation depth $\delta s_z/s_z$ is proportional to polarization energy splitting modulation depth $\delta\varepsilon/\varepsilon$. This gives an estimated birefringence modulation ($\delta\varepsilon/\varepsilon$) of $\sim 1\%$ in the microcavity resonator. The sensitivity of the strain in our experiment (S_ε) can be calculated from the measurement bandwidth ($BW \sim 10 \text{ Hz}$) and the maximum applied strain modulation [$\max(\epsilon_{rr}) = 4 \times 10^{-11}$] by $S_\varepsilon = \frac{\max(\epsilon_{rr})}{\sqrt{BW}} \simeq 1.3 \times 10^{-11} \text{ 1}/\sqrt{\text{Hz}}$. This confirms that opto-magneto-mechanical coupling of condensates with membrane vibrations can be achieved. It thus provides a way to control spin evolution in these condensates by appropriately engineering the strain distribution and dynamics.

The intensity modulation of the condensate when it is located around the center of the membrane is due to changes in the optical trapping. The change in the separation between two adjacent pump spots due to a 3 nm displacement of the membrane is estimated by geometrical optics to be $\sim 50 \text{ pm}$, while the overall change in the diameter of the Gaussian spots is negligible at the focus of the objective ($< 0.01 \text{ pm}$). To estimate how the change in the trap size affects the condensate intensity, we performed 2-dimensional Ginzburg-Landau simulations.²⁷ This shows that a 30 pm change in the $13 \mu\text{m}$ pump spot separation used here is sufficient to cause the 0.1% modulation in condensate intensity observed in the experiment. The stimulated scattering of polaritons into the condensate and hence the intensity of the condensate are highly sensitive to small changes in trap size (order 10^{-6}). Hence, a polariton condensate may have potential as an ultrasensitive microphonic sensor.

In conclusion, we demonstrate position-dependent intensity and spin modulation of an optically trapped polariton

condensate due to mechanical vibrations of a circular membrane microcavity resonator. The intensity is directly modulated by the displacement of the membrane, which for the lowest mode is maximum at the center $r=0$. Displacement of the membrane modulates the depth of the optical trap, which in turn modulates the occupation and intensity of the condensate. The spin is modulated by the strain and is maximum off-center (at $r=a/2$). The strain modulates the birefringence of the cavity ε and can be described by the spin-bifurcation model. Our experiment is sensitive to few-nanometer displacements and $<0.1\%$ changes in strain and could potentially be used as a sensor. Furthermore, by using smaller microcavity resonators, strong coupling of vibrations and spin may be achievable.

We acknowledge Grant Nos. EPSRC EP/L027151/1, ERC LINASS 320503, and Leverhulme Trust Grant No. VP1-2013-011. P.S. acknowledges support from ITMO Fellowship Program and megaGrant No. 14.Y26.31.0015 of the Ministry of Education and Science of Russian Federation. A.J.R. acknowledges support of Horizon 2020 programme (No. FETPROACT-2016 732894-HOT). Supporting research data can be found at: <http://doi.org/10.17863/CAM.16887>.

- ¹M. Aspelmeier, T. J. Kippenberg, and F. Marquardt, *Rev. Mod. Phys.* **86**, 1391 (2014).
- ²H. Okamoto, D. Ito, T. Watanabe, K. Onomitsu, H. Sanada, H. Gotoh, T. Sogawa, and H. Yamaguchi, *Phys. Rev. B* **84**, 014305 (2011).
- ³M. A. Hafiz, L. Kosuru, and M. I. Younis, *Nat. Commun.* **7**, 11137 (2016).
- ⁴P. Ovarthaiyapong, K. W. Lee, B. A. Myers, and A. C. B. Jayich, *Nat. Commun.* **5**, 4429 (2014).
- ⁵A. Hernández-Mínguez, J. M. Hernandez, F. Macià, A. García-Santiago, J. Tejada, and P. V. Santos, *Phys. Rev. Lett.* **95**, 217205 (2005).
- ⁶M. Weiler, L. Dreher, C. Heeg, H. Huebl, R. Gross, M. S. Brandt, and S. T. B. Goennenwein, *Phys. Rev. Lett.* **106**, 117601 (2011).
- ⁷K. Biermann, O. D. D. Couto, E. Cerda, H. B. de Carvalho, R. Hey, and P. V. Santos, *J. Supercond. Novel Magn.* **23**, 27 (2010).
- ⁸S. G. Carter, A. S. Bracker, M. K. Yakes, M. K. Zalalutdinov, M. Kim, C. S. Kim, C. Czarnocki, M. Scheibner, and D. Gammon, *Appl. Phys. Lett.* **111**, 183101 (2017).
- ⁹A. V. Kavokin, J. J. Baumberg, G. Malpuech, and F. P. Laussy, *Microcavities*, 2nd ed. (Oxford University Press, Oxford, New York, 2017).
- ¹⁰J. Kasprzak, M. Richard, S. Kundermann, A. Baas, P. Jeambrun, J. M. J. Keeling, F. M. Marchetti, M. H. Szymańska, R. André, J. L. Staehli, V. Savona, P. B. Littlewood, B. Deveaud, and L. S. Dang, *Nature* **443**, 409 (2006).
- ¹¹R. Balili, V. Hartwell, D. Snoko, L. Pfeiffer, and K. West, *Science* **316**, 1007 (2007).
- ¹²J. J. Baumberg, A. V. Kavokin, S. Christopoulos, A. J. D. Grundy, R. Butté, G. Christmann, D. D. Solnyshkov, G. Malpuech, G. Baldassarri Höger von Högersthal, E. Feltin, J.-F. Carlin, and N. Grandjean, *Phys. Rev. Lett.* **101**, 136409 (2008).
- ¹³R. Balili, B. Nelsen, D. W. Snoko, R. H. Reid, L. Pfeiffer, and K. West, *Phys. Rev. B* **81**, 125311 (2010).
- ¹⁴E. A. Cerda-Méndez, D. N. Krizhanovskii, M. Wouters, R. Bradley, K. Biermann, K. Guda, R. Hey, P. V. Santos, D. Sarkar, and M. S. Skolnick, *Phys. Rev. Lett.* **105**, 116402 (2010).
- ¹⁵N. Bobrovskaya, M. Matuszewski, T. C. H. Liew, and O. Kyriienko, *Phys. Rev. B* **95**, 085309 (2017).
- ¹⁶F. Benz, M. K. Schmidt, A. Dreismann, R. Chikkaraddy, Y. Zhang, A. Demetriadou, C. Carnegie, H. Ohadi, B. de Nijs, R. Esteban, J. Aizpurua, and J. J. Baumberg, *Science* **354**, 726 (2016).
- ¹⁷H. Ohadi, A. J. Ramsay, H. Sigurdsson, Y. del Valle-Inclan Redondo, S. I. Tsintzos, Z. Hatzopoulos, T. C. H. Liew, I. A. Shelykh, Y. G. Rubo, P. G. Savvidis, and J. J. Baumberg, *Phys. Rev. Lett.* **119**, 067401 (2017).
- ¹⁸P. Tsotsis, P. S. Eldridge, T. Gao, S. I. Tsintzos, Z. Hatzopoulos, and P. G. Savvidis, *New J. Phys.* **14**, 023060 (2012).
- ¹⁹H. Ohadi, A. Dreismann, Y. G. Rubo, F. Pinsker, Y. del Valle-Inclan Redondo, S. I. Tsintzos, Z. Hatzopoulos, P. G. Savvidis, and J. J. Baumberg, *Phys. Rev. X* **5**, 031002 (2015).
- ²⁰E. Wertz, L. Ferrier, D. D. Solnyshkov, R. Johne, D. Sanvitto, A. Lemaître, I. Sagnes, R. Grousson, A. V. Kavokin, P. Senellart, G. Malpuech, and J. Bloch, *Nat. Phys.* **6**, 860 (2010).
- ²¹G. Tosi, G. Christmann, N. G. Berloff, P. Tsotsis, T. Gao, Z. Hatzopoulos, P. G. Savvidis, and J. J. Baumberg, *Nat. Phys.* **8**, 190 (2012).
- ²²P. G. Savvidis, J. J. Baumberg, R. M. Stevenson, M. S. Skolnick, D. M. Whittaker, and J. S. Roberts, *Phys. Rev. Lett.* **84**, 1547 (2000).
- ²³A. Askitopoulos, L. Mouchliadis, I. Iorsh, G. Christmann, J. J. Baumberg, M. A. Kaliteevski, Z. Hatzopoulos, and P. G. Savvidis, *Phys. Rev. Lett.* **106**, 076401 (2011).
- ²⁴A. Harata, H. Nishimura, and T. Sawada, *Appl. Phys. Lett.* **57**, 132 (1990).
- ²⁵A. W. Leissa, *Vibration of Plates* (NASA, 1969).
- ²⁶S. Adachi, *Properties of Aluminium Gallium Arsenide* (IET, 1993).
- ²⁷M. Wouters and I. Carusotto, *Phys. Rev. Lett.* **99**, 140402 (2007).